

1.27mm Female Contact

Designed for Crimping to Membrane
Switches, Flexible Circuits, Jumper
Cables, Sensors, Textile Ribbons etc


Tin and Gold Plating as Standard,
Others Available Upon Request

Suitable for use with MH Series
Housings/Wafers

Contact your Local Office for Application/
Crimping Equipment

1.27mm Pitch, Phosphor Bronze

RoHS Compliant, Lead Free

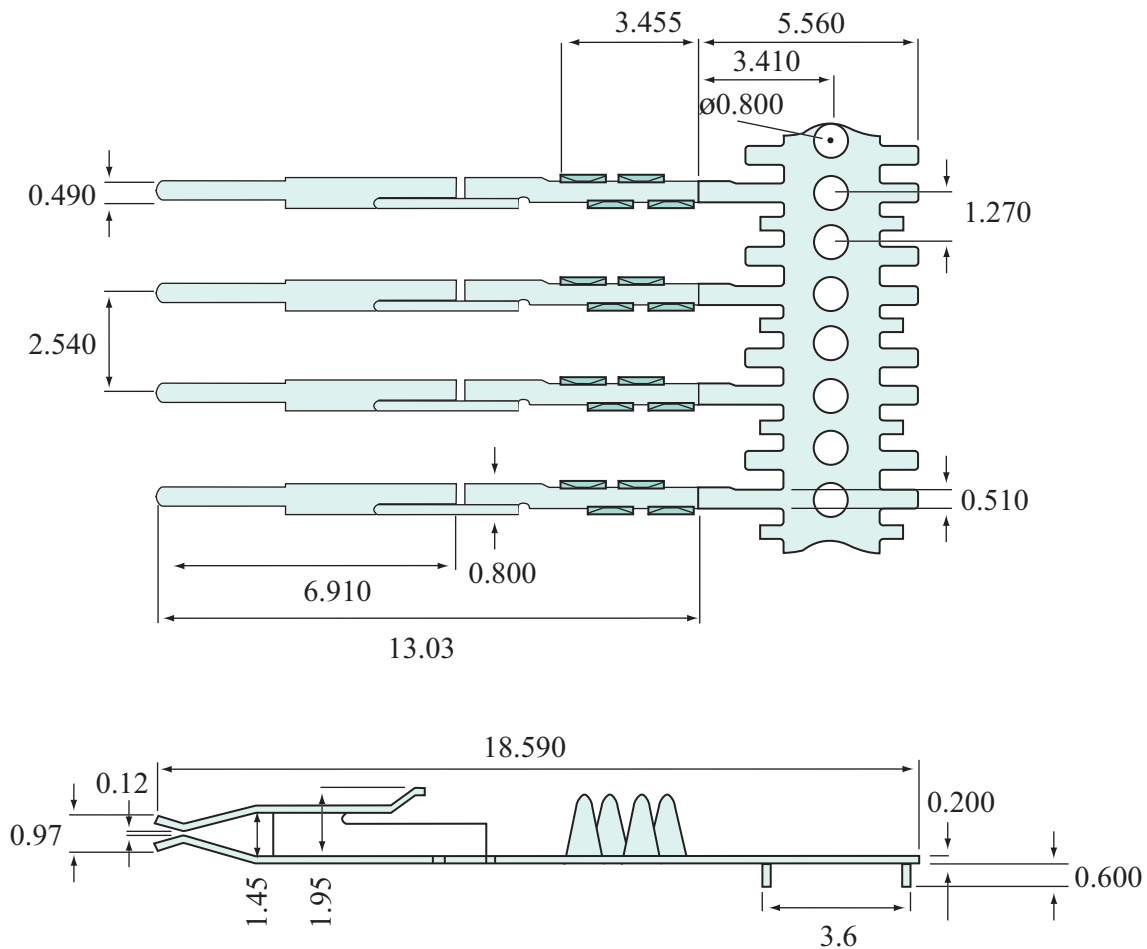

Unit : mm

Part Number	Description	Plating	Reel Quantity
MFPFC547-T	High Insertion Force Female	Tin	30,000
MFPFC547-SG	High Insertion Force Female	Selective Gold	30,000
MFPFC547-G	High Insertion Force Female	Gold	30,000
OTHER PLATING AND REEL SIZES AVAILABLE ON REQUEST			