

## Hi Flex Female Contact

Designed for Crimping to Membrane Switches, Flexible Circuits, Jumper Cables, Sensors, Textile Ribbons etc

Suitable for use with MH Series Housings/Wafers

Stable Insertion Force/Contact Res for Flexible Mating Cycles

2.54mm Pitch, Phosphor Bronze


Tin and Gold Plating as Standard, Others Available Upon Request

Contact your Local Office for Application/ Crimping Equipment

High Force Contact MHFC025 & Low Force Contact MLFC506 also available

RoHS Compliant, Lead Free



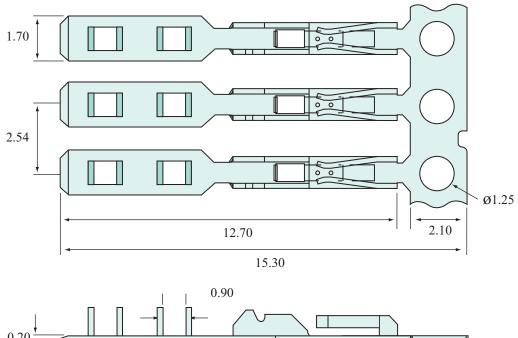

2.55	30

Unit: mm

Part Number	Description	Plating	Reel Quantity	
MHFFC106-T35	Hi Flex Female	Tin	35,000	
MHFFC106-SG35	Hi Flex Female	Selective Gold	35,000	
MHFFC106-G35	Hi Flex Female	Gold	35,000	
OTHER PLATING AND REEL SIZES AVAILABLE ON REQUEST				