


## **DOUBLE SIDED ADHESIVE TAPE**

Our range of adhesive products have been specifically developed for use in the label, name plate, membrane switch, front panel, flexible circuits, EL, sensors and other applications that require high performance adhesives.

Developed for use in the harshest of conditions, our tapes demonstrate outstanding resistance to hostile environments.

Our Double Sided Tapes are ideal for use in metal or plastic name plate style and associated applications. The range of high performance Double Sided Tapes provide a high level of adhesion together with good holding power. They also exert excellent temperature and repulsion resistance.

The MDST series tapes provide a high quality product at a price positioned to help our customers compete in this competitive market.

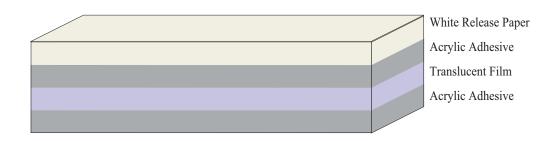

Part Number	MDST120	MDST140	MDST160
Tape Thickness, mm	0.120	0.140	0.160
Carrier Material	Tissue	Tissue	Tissue
Colour	Translucent	Translucent	Translucent
Adhesion to Steel, N/25mm	14	14	14
Adhesion to PP, N/25mm	11	11	11
Adhesion to PE, N/25mm	14	14	14
Tack, Ball Number	11	11	11
Holding Power, hr/10mm x 25mm/kg, 25°C	>4	>4	>4
Holding Power, hr/25mm x 25mm/kg, 80°C	24	24	24

The performance characteristics are those results obtained in our laboratory.

Before adopting our products for commercial use, the user assumes responsibility for determining fitness of use in their particular application and process.

## M≡M□□□ Limited

Compass House Vision Park Chivers Way HISTON Cambridge CB24 9AD United Kingdom T +44 1223 257724 F +44 1223 257800 www.memcon.eu sales@memcon.eu Memcon makes no warranties and assumes no liability in connection with any use of this information.

## M≡M□□□ (Asia) Limited

Level 7 Parkview Centre
7 Lau Li Street Causeway Bay Hong Kong
T +852 3741 1411 F +852 3747 8980
www.memcon.asia sales@memcon.asia